




云智科技
YDEACHN.COM

Service Hotline: 400-666-9216

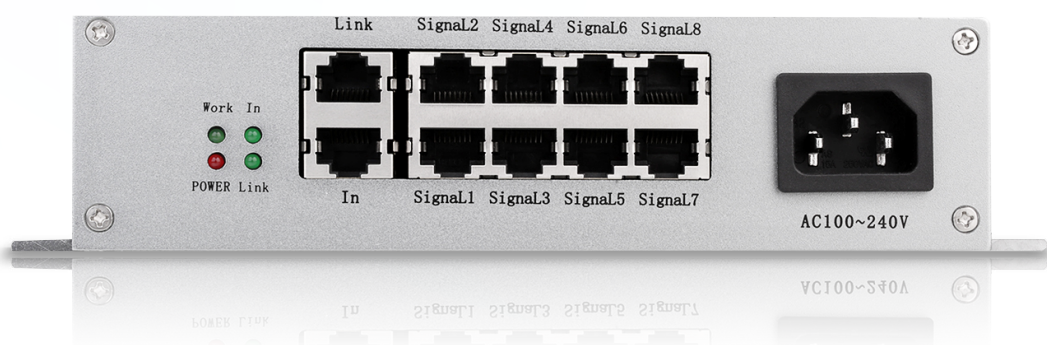

Distributor Specification

T-1.0

Version: V02 Date: 2017-07-31

Product Summary

T1.0 Distributor is YDEA-TECH company's independent research and development of the LED display Distributor Fast Gigabit switch, multi-channel signal input and output management, intelligent split video signal, the signal reallocate organization fully supports online fault diagnosis, so that the system is running more stable and reliable, suitable for building displays, lighting engineering and other fixed installations.


Product Feature

- 1 Ethernet port input, 1 Ethernet port ring out.
- 8 Ethernet ports output.
- Two-way backup.
- Cascade stitching.
- Long distance cable transmission.


Technical Specifications

Control area	1280 * 1024	Distributor	-
Input resolution	640x480-1920 × 1200	Load Split	Horizontal
Output resolution	1280 * 1024	Shaped Display	Support
Multi-machine in parallel	Support	Transmission distance	100m
Video Input	DVI	Control Interface	USB
Intelligent Recognition	Support	Temperature	-10℃-60℃
Pixel by pixel correction	Luminance、Color	Power	DC 5V
Online upgrade	Support	Size (L × W)	126 * 99.7 (mm)

Board Dimensions

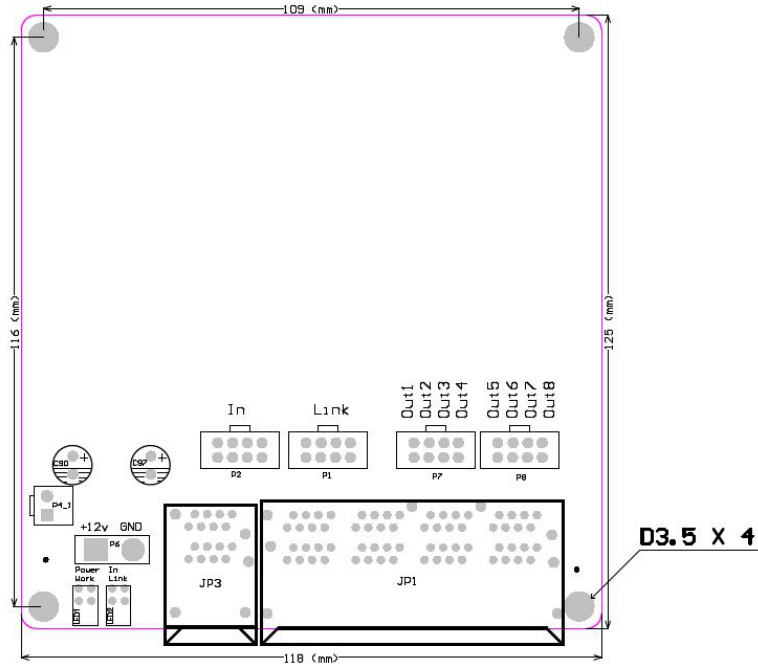


Chassis Interface Definition

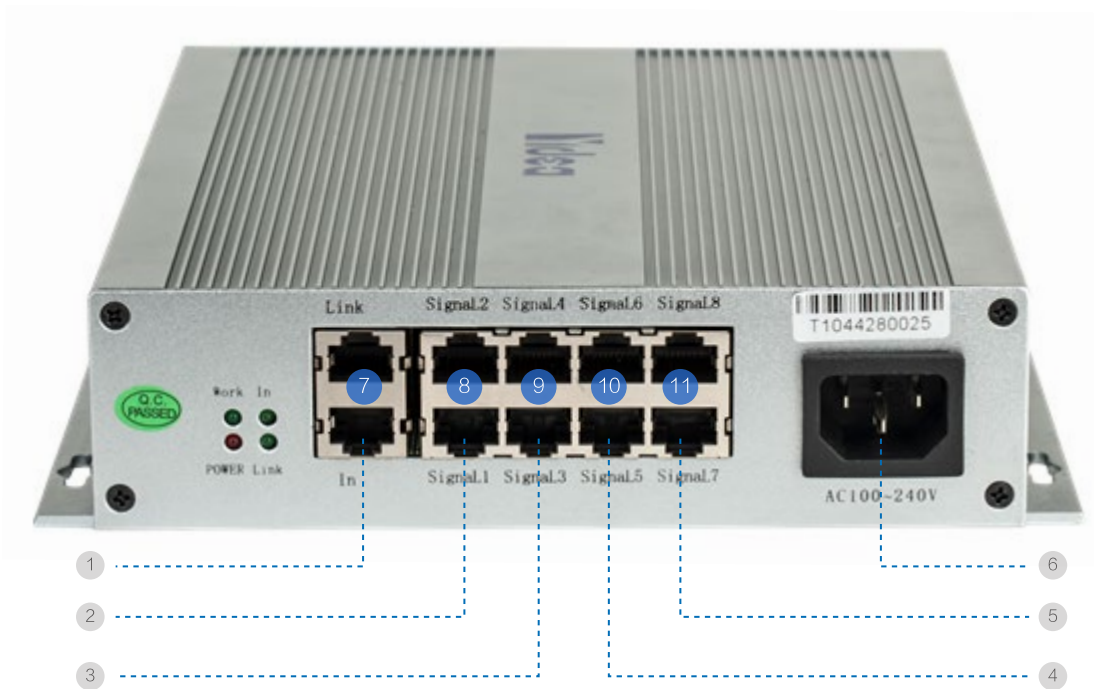

- | | | | | | |
|------------------|------------|------------|------------|------------|---------|
| ① Signal input | ② Output 1 | ③ Output 3 | ④ Output 5 | ⑤ Output 7 | ⑥ Power |
| ⑦ Cascade output | ⑧ Output 2 | ⑨ Output 4 | ⑩ Output 6 | ⑪ Output 8 | |

Board Interface Definition

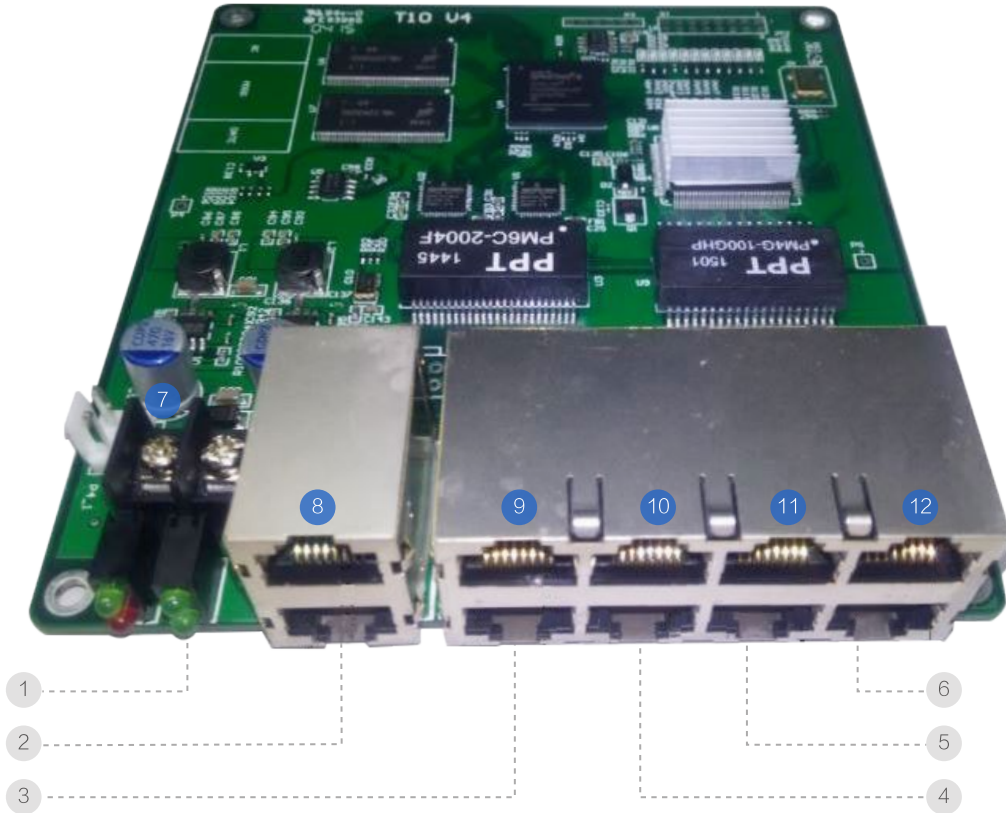

- | | | | | | |
|-------------|-------------------------|-------------------|-------------------|-------------------|-------------------|
| ① Indicator | ② Signal input | ③ Signal output 1 | ④ Signal output 3 | ⑤ Signal output 5 | ⑥ Signal output 8 |
| ⑦ Power | ⑧ Signal cascade output | ⑨ Signal output 2 | ⑩ Signal output 4 | ⑪ Signal output 6 | ⑫ Signal output 7 |